

Thank you for purchasing the 200 MHz Passive Probe 701938. To ensure correct use, please read this manual thoroughly before beginning operation. After reading the manual, keep it in a convenient location for quick reference whenever a question arises during operation.

2nd Edition : May 2012 (YMI)
All Rights Reserved, Copyright © 2008, Yokogawa Electric Corporation
All Rights Reserved, Copyright © 2012, Yokogawa Meters & Instruments Corporation



IM 701938-01E
2nd Edition

Safety Precautions

Make sure to comply with the safety precautions mentioned hereafter when handling the probe. Yokogawa Electric Corporation assumes no responsibility for any consequences resulting from failure to comply with these safety precautions. Also, read the User's Manual of the measuring instrument thoroughly so that you are fully aware of its specifications and handling, before starting to use the probe.

The following symbols are used on this instrument.

Warning: handle with care. Refer to the user's manual or service manual. This symbol appears on dangerous locations on the instrument which require special instructions for proper handling or use. The same symbol appears in the corresponding place in the manual to identify those instructions.

Make sure to comply with the following safety precautions in order to prevent accidents such as an electric shock which impose serious health risks to the user and damage to the instrument.

WARNING

Grounding of the measuring instrument

The protective grounding terminal of the measuring instrument must be connected to ground.

Ground lead of the probe

Make sure to connect the ground lead of the probe to the grounding potential.

Handling of the passive probe

Do not touch the probe's input terminal or the probe itself with wet hands.

Do not operate with suspected failures

If you suspect that there is damage to this probe, have it inspect by a service personnel.

Observe maximum working voltage

When the oscilloscope's input coupling is AC, DC voltage of the same electric potential as the probe's input is applied to the oscilloscope's input. Make sure not to exceed the oscilloscope's maximum input voltage.

Do not operate in wet/damp conditions

To avoid electric shock, do not operate this probe in wet or damp conditions.

Do not operate in explosive atmosphere

To avoid injury or fire hazard, do not operate this probe in an explosive atmosphere.

Avoid exposed circuitry

To avoid injury, remove jewelry such as rings, watches, and other metallic objects. Do not touch exposed connections and components when power is present.

CAUTION

Maximum input voltage

Do not apply any voltages exceeding the maximum input voltage to the probe.

Waste Electrical and Electronic Equipment



Waste Electrical and Electronic Equipment (WEEE), Directive 2002/96/EC

(This directive is valid only in the EU.)

This product complies with the WEEE Directive (2002/96/EC) marking requirement. This marking indicates that you must not discard this electrical/electronic product in domestic household waste.

Product Category

With reference to the equipment types in the WEEE directive Annex 1, this product is classified as a "Monitoring and Control instrumentation" product.

Do not dispose in domestic household waste. When disposing products in the EU, contact your local Yokogawa Europe B. V. office.

The following symbols are used in this manual.

Warning: Improper handling or use can lead to injury to the user or damage to the instrument. This symbol appears on the instrument to indicate that the user must refer to the user's manual for special instructions. The same symbol appears in the corresponding place in the user's manual to identify those instructions. In the manual, the symbol is used in conjunction with the word "WARNING" or "CAUTION."

WARNING: Calls attention to actions or conditions that could cause serious or fatal injury to the user, and precautions that can be taken to prevent such occurrences.


CAUTION: Calls attention to actions or conditions that could cause light injury to the user or damage to the instrument or the user's data, and precautions that can be taken to prevent such occurrences.

Note: Calls attention to information that is important for proper operation of the instrument.

1 Description

701938 is a 200MHz passive probe with probe ID pin and attenuation ratio of 1/10. This probe can be used for oscilloscopes with input impedances of 1 MΩ.

2 Appearance

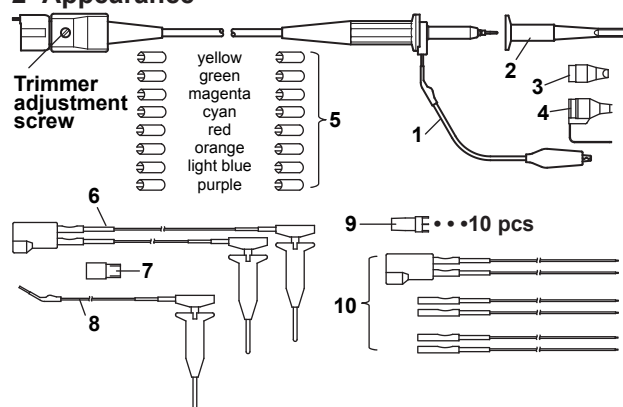

Standard Accessories

Name	Part No.
1 Ground lead	B9852BD
2 Pinchers tip	B9852BE
3 IC test tip	B9852BF
4 Ground attachment	B9852BG
5 Marker tip	B8099DT

Optional Accessories (Sold Separately)

Name	Model
6 Mini clip adapter	700971
7 BNC adapter	700972
8 Ground lead	700973
9 Printed circuit board adapter	366945
10 Solder-in adapter	366946


3 Operation

Use adequate attachment suitable for the point to measure.

Before using the probe, adjust its capacitance by tuning the trimmer.

Adjustment

1. Connect the probe connector to the input of the oscilloscope, and connect the tip of the probe to the CAL signal output terminal.
2. Change the T/Div and the V/Div to get the display shown below. And tune the trimmer to get the correct waveform.

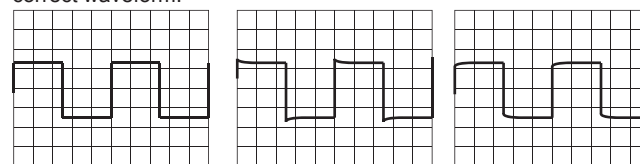

Correct Waveform Over Compensation Inadequate Compensation



WARNING

- Make sure to avoid an electric shock when connecting the probe to the object of measurement. Do not remove the probe from the measuring instrument after the object of measurement is connected.
- When disconnecting the probe BNC output connector, first turn OFF the power to the circuit under measurement. Then, disconnect the probe from the high voltage parts of the circuit under measurement.



CAUTION

Use a soft cloth to clean the dirt. Prevent damage to the probe. Avoid immersing the probe, using abrasive cleaners, and using chemicals contains benzene or similar solvents.

Note

Accurate measurement may not be possible near objects with strong electric fields (such as cordless equipment, transformers, or circuits with large currents).

4 Specifications

Item	Specifications
Probe length	1.5 m
Connector type	BNC
Input resistance	10MΩ ±2%
Input capacitance	In conjunction with an oscilloscope with an input impedance of 1MΩ ±1%. Approx. 13.5 pF In conjunction with an oscilloscope with an input impedance of 1MΩ ±1%.
Attenuation ratio	1/10 ±2% In conjunction with an oscilloscope with an input impedance of 1MΩ ±1%.
Frequency Band (≤-3 dB)	DC to 200 MHz Subject to change depending on type of oscilloscope used.
Rise time	1.75 ns max. (typical ¹) Subject to change depending on type of oscilloscope used.
Max input voltage ²	600 V (DC + ACpeak) or 424 Vrms
Operating temperature	5 to 40°C
Operating maximum relative humidity	80% RH at a temperature of up to 31°C, decreasing linearly to 50% RH at 40°C if the temperature is 31°C or higher.
Operating altitude	3,000 m or less
Storage temperature	-20 to 70°C
Storage humidity	90%RH or less (-20 to +55°C) 45%RH or less(+55 to +70°C)
Storage altitude	4,600 m or less
Matching input capacitance (at 1/10)	Approx. 15 to 25 pF Oscilloscope measurement input capacity
Safety standards	Complying standards EN61010-031 Measurement category I ³ : 60 V (DC + ACpeak) Pollution degree 2 ⁴

*1 Typical (or average) value; not guaranteed.

*2 The maximum allowable input decreases depending on the frequency. Refer to the deleting curve

*3 This equipment is for measurement category I (CAT I), Do not use it with measurement category II (CAT II), measurement category III (CAT III), nor measurement category IV (CAT IV).

CAT I applies to electrical equipment on a circuit that is not connected directly to the power source and measurement performed on such wiring. CAT II applies to electrical equipment that is powered through a fixed installation such as a wall outlet wired to a distribution board and measurement performed on such wiring. CAT III applies to measurement of the distribution level, that is, building wiring, fixed installations. CAT IV applies to measurement of the primary supply level, that is, overhead lines, cable systems, and so on.

*4 Pollution degree applies to the degree of adhesion of a solid, liquid, or gas which deteriorates withstand voltage or surface resistivity. Pollution degree 2 applies to normal indoor atmospheres (with only non-conductive pollution).

Input voltage derating

