



Manage Electrode Reaction Resistance,  
Electrolyte Resistance,  
and Welding Resistance

The Ultimate Instrument for Measuring Large-Capacity Li-ion Batteries for EVs


# Improve the quality of battery cell inspections

- Set your own measurement frequency between 100 mHz and 1.05 kHz
- Use low frequencies to measure **electrode reaction resistance**
- Use high frequencies to measure **electrolyte resistance and welding resistance**
- Create Cole-Cole plots (with bundled application program)
- Use equivalent circuit analytic software to analyze internal battery defects




## Use the BT4560 for impedance measurement... To isolate defective factors in battery cells

### Conceptual diagram of a battery

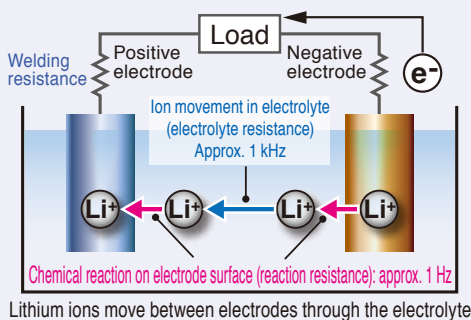


### Battery equivalence circuit



Inspect both electrolyte and reaction resistance

### Cole-Cole plot

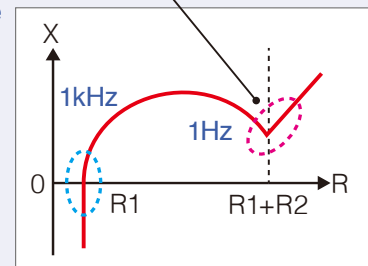


Electrolyte resistance and welding resistance (blue dashed circle) Reaction resistance (pink dashed circle)

When R1 is larger... Electrolyte concentration might be reduced, or the electrode might have poor welding

When R2 is larger... A failure might have occurred during the electrode production process, or the electrode might react poorly on its surface

## DC-IR measurement using a charging/discharging tester

DC-IR measurement passes electric currents into R1 and R2, which makes it difficult to measure electrolyte resistance and reaction resistance separately. (See the equivalent circuit diagram shown above)

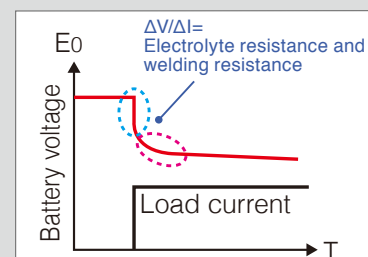


# Exceptional Accuracy Unsurpassed Stability

Also measure large-capacity  
Li-ion batteries

## Measure very low impedances of 1mΩ or less

Some high-capacity Li-ion batteries have an internal impedance less than 1 mΩ.


The BT4560 can measure very low impedances of 1mΩ or less, stably and with high reproducibility.

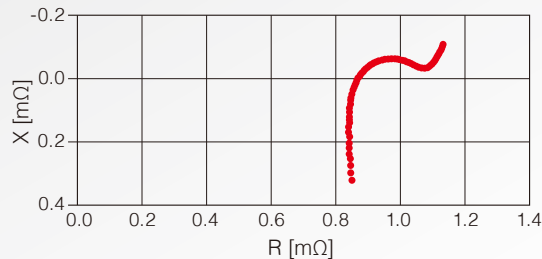

## Measure DC voltage with high accuracy

Accuracy:  $\pm 0.0035\%$  rdg.  $\pm 5$  dgt.

The BT4560 achieves an accuracy comparable to a 6.5-digit DMM. It can be used to measure both OCV and impedance in batteries.

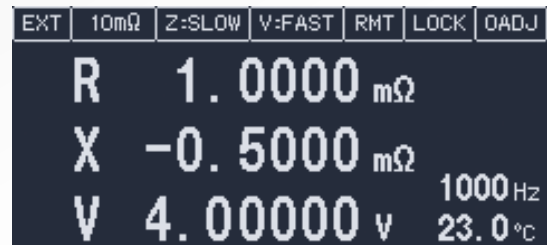


Measure 4-V Li-ion battery cells at an accuracy of  $\pm 190 \mu\text{V}$


## Four-terminal pair measurement resolves system construction problems

The four-terminal pair method reduces various effects of induced magnetic fields, such as cabling influence, eddy-current influence due to surrounding metals, and interference when multiple devices are used simultaneously. When compared to the conventional four-terminal method, the BT4560 controls magnetic fluxes generated by the measurement current. This significantly reduces the impact on the measured value when cabling for measurements is changed, improving stability when the measurement instrument is embedded within the production line.

### Magnetic flux influence using the conventional four-terminal method

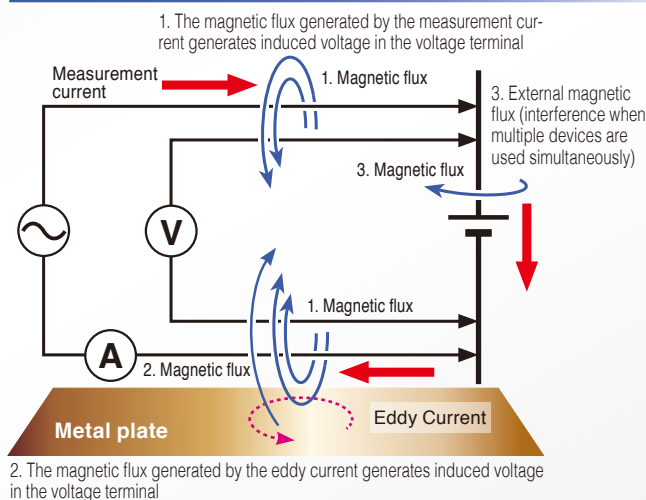

### Impedance measurement using the four-terminal pair method

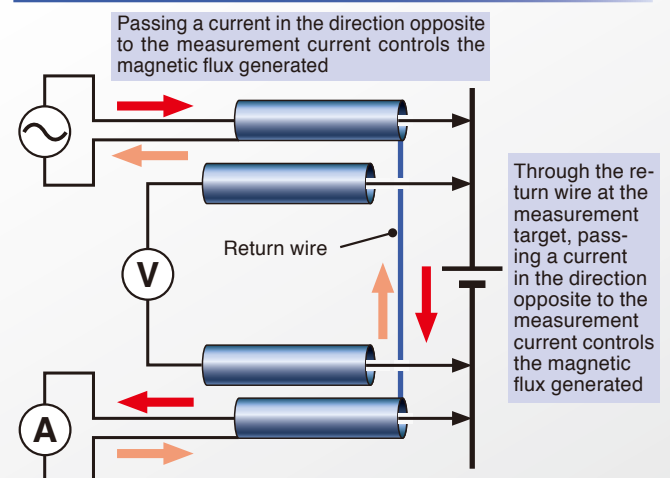


## Dedicated probes for four-terminal pair measurement reduce the magnetic flux generated

Dedicated probes with the four-terminal pair structure provide stable measurement less affected by environmental noise or cabling.


### CLIP TYPE PROBE L2002

For measuring laminated sheet batteries

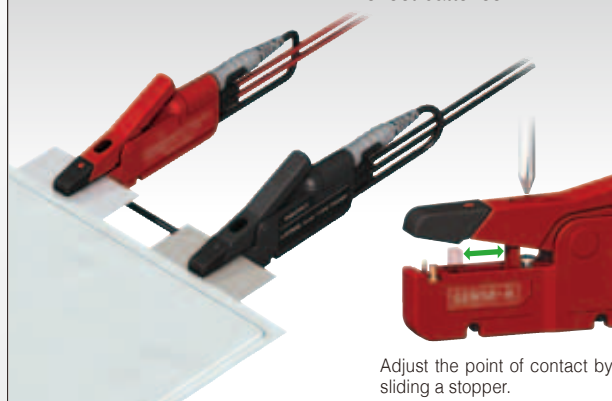

### PIN TYPE PROBE L2003

For line-embedded applications and various other types of batteries

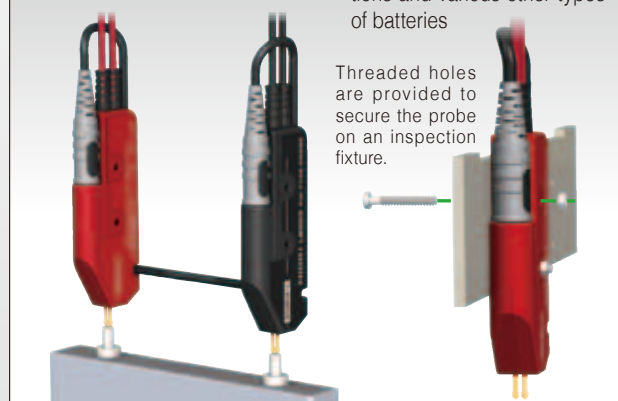



\* Contact your local Hioki distributor for details of the probe tip shapes

# Using impedance data measured with the

## Battery cell selection extends the battery pack service life


### Battery pack deterioration factors

Heat reduces or deteriorates the battery capacity. Large-capacity batteries for EVs that charge/discharge with large currents generate significant amounts of heat.

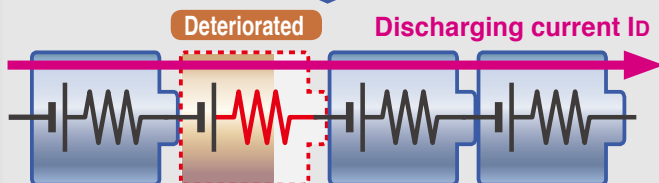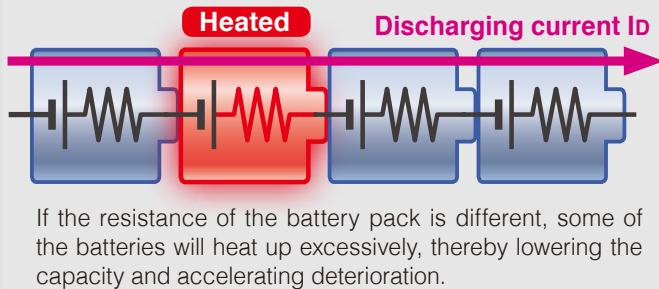

### Selection is necessary for extending battery pack service life



Combining cells with the same battery capacity and internal resistance equalizes heat generated, extending the service life.

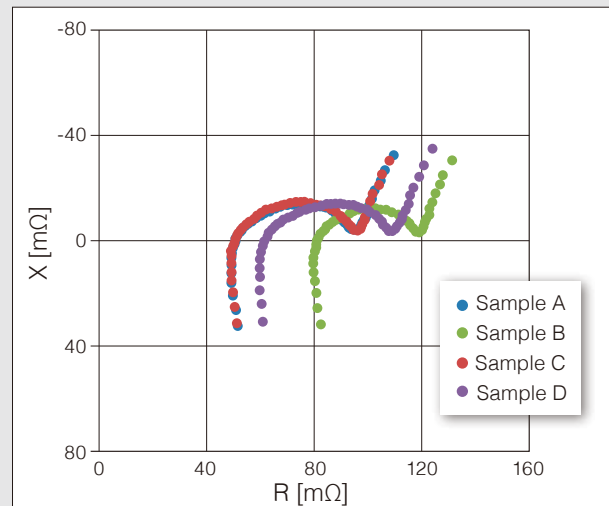

The above diagram contains Cole-Cole plots for new battery cells of the same kind. A and C have almost consistent impedance characteristics.

Due to having impedance greater than A and C, B and D produce heat and deteriorate first when they are used within the same battery pack.

## Checking the battery deterioration level

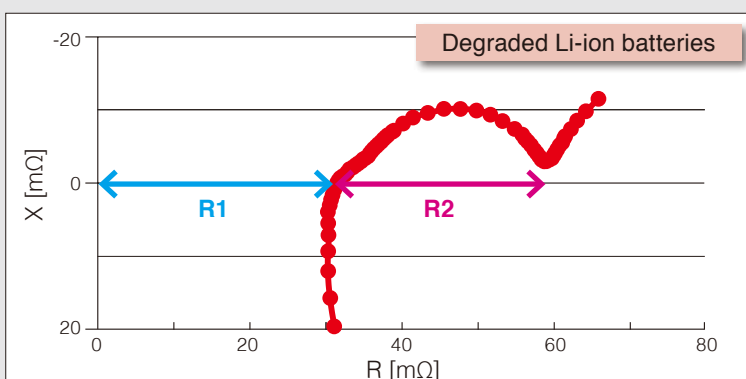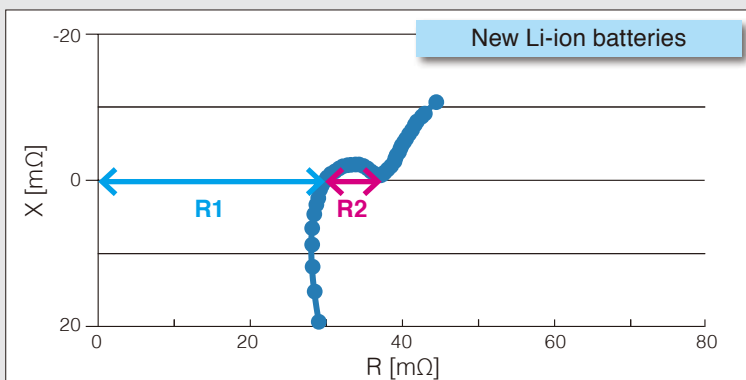

### Compare measured data for new and deteriorated batteries

Here, Cole-Cole plot data is compared for new Li-ion battery cells (upper-left plot) and deteriorated Li-ion battery cells of the same kind (lower-left plot).

**R1: Electrolyte resistance and welding resistance**

**R2: Reaction resistance**  
(Reaction resistance of positive/negative electrodes)

Comparing the new Li-ion battery with the deteriorated one confirms significant changes in the reaction resistance value.

Although much depends on the deterioration factors, in addition to heat effects, the deterioration of the electrode reactive portion appears on a graph as reaction resistance for particular applications, such as repeated charging/discharging at low temperature and repeated deep charging/discharging (SOC: Between 0 and 100%).




# BT4560

To assess Li-on battery deterioration levels and select batteries for inclusion in manufacturing and production lines

## Isolate battery deterioration factors

Cole-Cole plot data obtained by using the BT4560 and commercially-available equivalent circuit analysis software, such as "ZView®", can be used to analyze deterioration factors.

An example of a pseudo-equivalent circuit

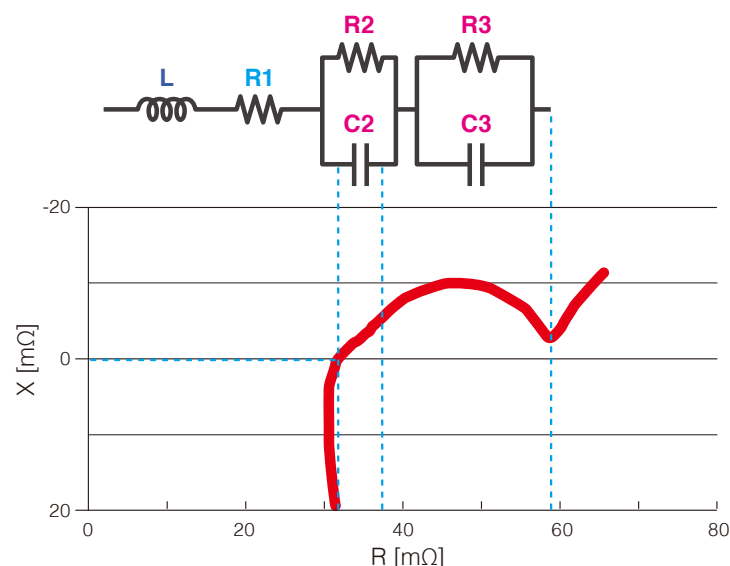

The impedance characteristics of a Cole-Cole plot are generally expressed as a pseudo equivalent circuit.

A pseudo equivalent circuit is expressed by:

**Resistance in the electrolyte and tab welding portions (R1)**

**Positive/negative electrode reactions within the battery (R2//C2, R3//C3)**


**Lead and other inductance (L)**

... to give just a few examples.

Once a pseudo equivalent circuit is constructed, equivalent circuit analysis software (ZView®) can provide the circuit constant of each element by means of curve fitting. Quantifying the changes in each element's constant when a battery is new and when it deteriorates allows analysis of which portions within the battery have changed. This serves to isolate battery deterioration factors.

## Create Cole-Cole plots using bundled software

A free PC application that comes with the BT4560 can conduct measurement and draw Cole-Cole plots. Additionally, "ZView®" from Scribner Associates Inc. also provides detailed analysis based on equivalent circuit analysis.

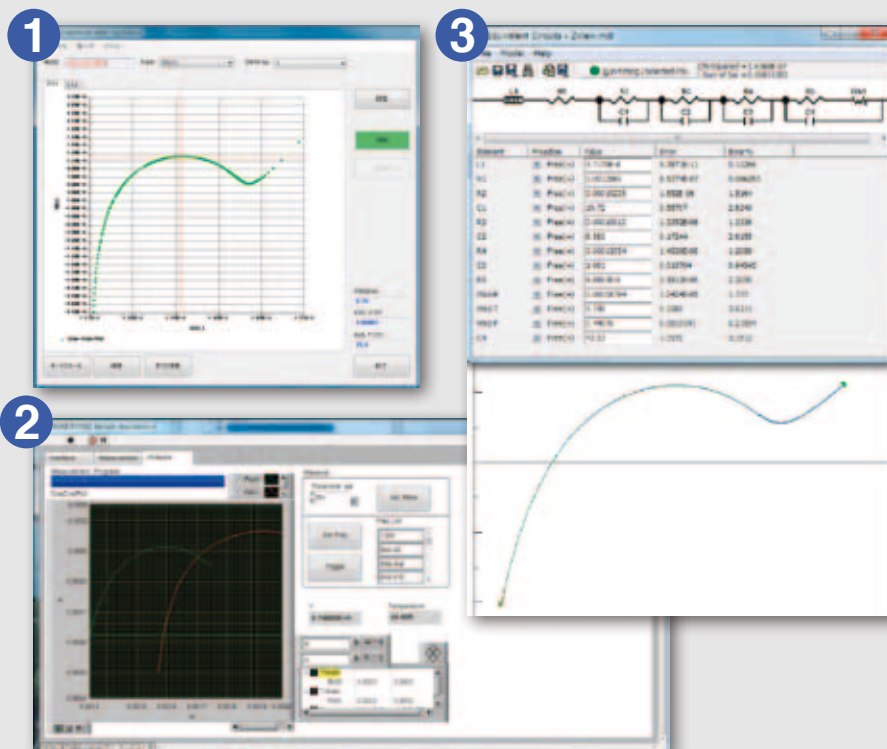

### 1 Bundled PC application

Creates Cole-Cole plots. Measurement results can also be output in Excel and CSV files.


### 2 Application bundled with LabView driver

Compares multiple overlaid graphs. Equipped with a simple equivalent circuit analysis function, this application also gives insight into electrolyte resistance and reaction resistance.

### 3 AC impedance analysis software "ZView®"

"ZView®" creates certain equivalent circuits based on CSV files output from the above application 1, while quantifying each element, to analyze deteriorated portions in a battery.

# Characteristics and features of BT4560

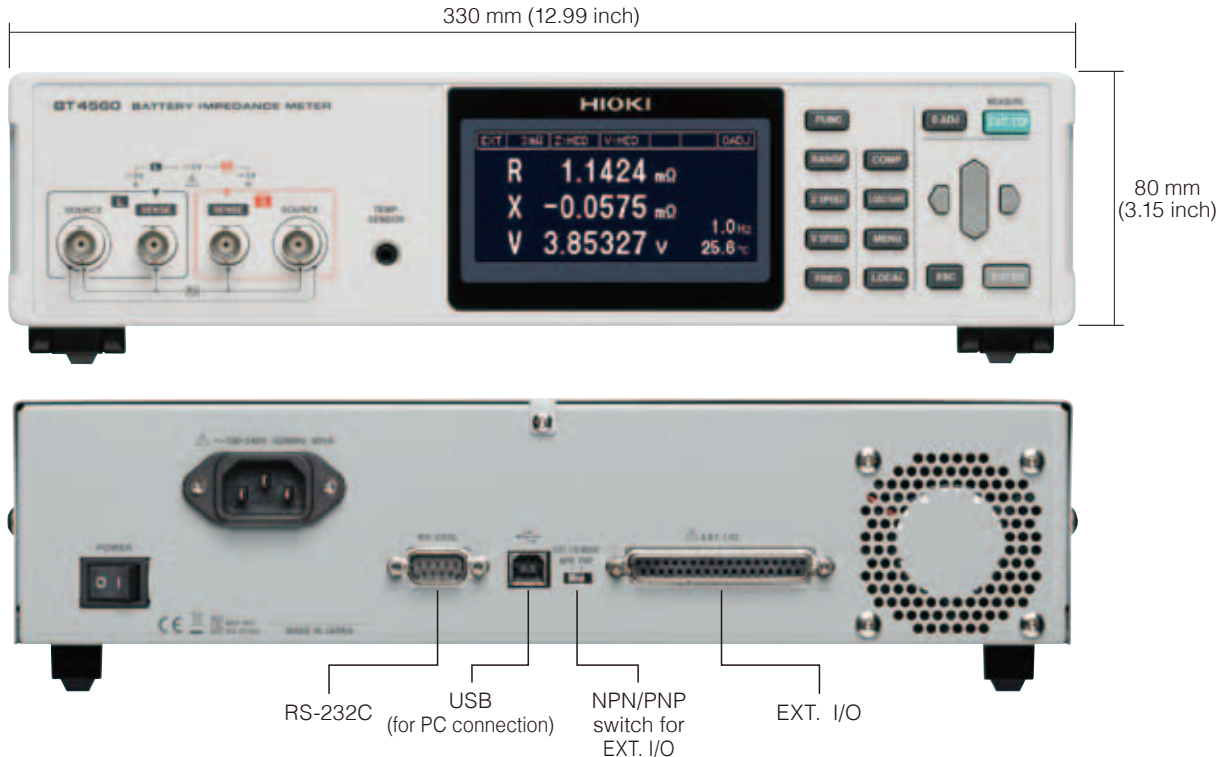

## All-in-one compact unit

The BT4560 requires no loading devices and provides measurements simply as a stand-alone unit, without having to establish a complicated measurement system.

## Self-calibration

Correct any offset voltage and gain drift that may be present in the circuit to improve the accuracy of voltage measurement.

## Sample delay\*

Specify a delay between AC voltage being applied and sampling being started so that measurement can start after the response stabilizes.

## Prevent charging or discharging when AC voltage is applied\*

To prevent the battery that is being measured from charging or discharging, the battery impedance meter terminates the applied measurement signal when zero is crossed.

## Simultaneous measurement of impedance and voltage

Reduce tact time by testing both impedance and high accuracy DC voltage at the same time.

## Slope correction function\*

If measurement signals drift due to the battery characteristics or the input impedance of measurement instrument, the BT4560 applies correction to the linear drift.

## Temperature measurement

Reaction resistance measured at low frequency is sensitive to temperature.


An optional temperature sensor measures the temperature around the battery and associates the results with data, thereby improving the reliability of the measurements.

\*Functions available during impedance measurement

## Functions to accommodate automated machines

### Contact check

Monitor the contact resistance of the probe before and after measurement so that the measurement will only start when the measuring electrode on the probe is in contact with the object to be measured.




### NPN/PNP switch

Switch the input/output circuits for EXT. I/O according to the type of output: current sink output (NPN) or current source output (PNP).


### Comparator

- Simultaneously measure impedance and voltage
- Output overall determination results
- Use the two-tone buzzer to indicate determination results



### Panel saving and loading

Store up to 126 sets of measurement conditions in internal memory so that they can be called through EXT. I/O for future measurements.



# Accuracy specifications

## Impedance measurement accuracy

○ 3 mΩ range (0.1 Hz to 100 Hz), 10 mΩ range, 100 mΩ range

R accuracy =  $\pm (0.004 |R| + 0.0017 |X|)$  [mΩ]  $\pm \alpha$

X accuracy =  $\pm (0.004 |X| + 0.0017 |R|)$  [mΩ]  $\pm \alpha$

(The units of R and X are [mΩ].  $\alpha$  is as shown in the table below.)


Z accuracy =  $\pm 0.4\%$  rdg.  $\pm \alpha (|\sin\theta| + |\cos\theta|)$

$\theta$  accuracy =  $\pm 0.1^\circ \pm 57.3 \frac{\alpha}{Z} (|\sin\theta| + |\cos\theta|)$   
( $\alpha$  is as shown in the table below.)

		3 mΩ range	10 mΩ range	100 mΩ range
α	FAST	25 dgt.	60 dgt.	60 dgt.
	MED	15 dgt.	30 dgt.	30 dgt.
	SLOW	8 dgt.	15 dgt.	15 dgt.
Temperature coefficient		R: ± R accuracy × 0.1 / °C, X: ± X accuracy × 0.1 / °C, Z: ± Z accuracy × 0.1 / °C, θ: ± θ accuracy × 0.1 / °C, (Applied in the ranges of 0 °C to 18 °C and 28 °C to 40 °C)		

R:  $\pm$  R accuracy  $\times 0.1 / ^\circ\text{C}$ , X:  $\pm$  X accuracy  $\times 0.1 / ^\circ\text{C}$ , Z:  $\pm$  Z accuracy  $\times 0.1 / ^\circ\text{C}$ ,  $\theta$ :  $\pm$   $\theta$  accuracy  $\times 0.1 / ^\circ\text{C}$ ,  
(Applied in the ranges of 0 °C to 18°C and 28°C to 40 °C)

## Accuracy graph

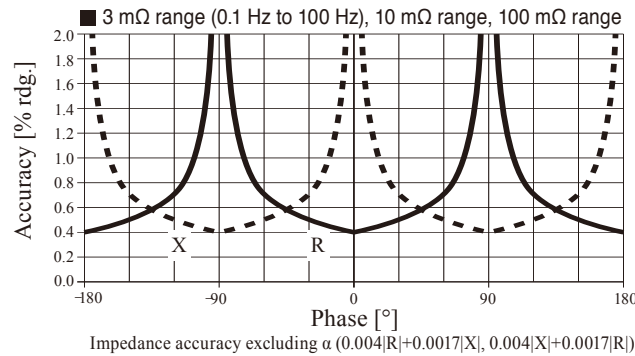

○ 3 mΩ range (110 Hz to 1050 Hz)


R accuracy =  $\pm (0.004 |R| + 0.0052 |X|)$  [mΩ]  $\pm \alpha$

X accuracy =  $\pm (0.004 |X| + 0.0052 |R|)$  [mΩ]  $\pm \alpha$

(The units of R and X are [mΩ].  $\alpha$  is as shown in the table below.)

Z accuracy =  $\pm 0.4\%$  rdg.  $\pm \alpha (|\sin\theta| + |\cos\theta|)$

$\theta$  accuracy =  $\pm 0.3^\circ \pm 57.3 \frac{\alpha}{Z} (|\sin\theta| + |\cos\theta|)$   
( $\alpha$  is as shown in the table below.)

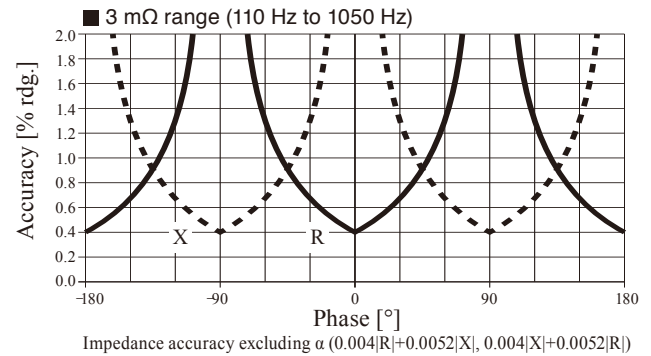

## Voltage measurement accuracy (when self-calibration is performed)

V	Display range	-5.10000 V to 5.10000 V
	Resolution	10 $\mu\text{V}$
Voltage accuracy	FAST	$\pm 0.0035\%$ rdg. $\pm 5$ dgt.
	MED	$\pm 0.0035\%$ rdg. $\pm 5$ dgt.
	SLOW	$\pm 0.0035\%$ rdg. $\pm 5$ dgt.
Temperature coefficient		$\pm 0.0005\%$ rdg. $\pm 1$ dgt. $^\circ\text{C}$ (applied in the ranges of 0°C to 18°C and 28°C to 40°C)

## Temperature measurement accuracy (BT4560 + Z2005 temperature sensor)

Accuracy	$\pm 0.5^\circ\text{C}$ (measurement temperature: 10.0°C to 40.0°C) $\pm 1.0^\circ\text{C}$ (measurement temperature: -10.0°C to 9.9°C, 40.1°C to 60.0°C)
Temperature coefficient	Temperature coefficient: $\pm 0.01^\circ\text{C}/^\circ\text{C}$ (applied in the ranges of 0°C to 18°C and 28°C to 40°C)

## BT4560 specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

Measured signals	Impedance, voltage, temperature		
Impedance measurement			
Measurement parameters	R resistance, X reactance, Z impedance, $\theta$ phase angle		
Measurement frequency	0.1 Hz to 1050 Hz		
Frequency setting resolution	0.10 Hz to 0.99 Hz in 0.01-Hz increments		
	1.0 Hz to 9.9 Hz in 0.1-Hz increments		
	10 Hz to 99 Hz in 1-Hz increments		
	100 Hz to 1050 Hz in 10-Hz increments		
Measurement ranges	3.0000 m $\Omega$ , 10.0000 m $\Omega$ , 100.000 m $\Omega$		
Measurement current/DC load (DC load: offset current applied to measured object during impedance measurement)			
	3 m $\Omega$ range	10 m $\Omega$ range	100 m $\Omega$ range
Measurement current	1.5 Arms $\pm 10\%$	500 mArms $\pm 10\%$	50 mArms $\pm 10\%$
DC load current	1 mA or less	0.35 mA or less	0.035 mA or less
Measurement wave number			
	FAST	MED	SLOW
0.10 Hz to 66 Hz	1 wave	2 waves	8 waves
67 Hz to 250 Hz	2 waves	8 waves	32 waves
260 Hz to 1050 Hz	8 waves	32 waves	128 waves
Voltage measurement			
Measurement range	5.00000 V (single range)		
Resolution	10 $\mu$ V		
Measurement time	FAST : 0.1 s MED : 0.4 s SLOW : 1.0 s		
	* When self-calibration is performed, 0.21s is added to the measurement time.		
Temperature measurement			
Display range	-10.0°C to 60.0°C		
Resolution	0.1°C		
Measurement time	2.3 s		
Measurement functions	(R,X,V,T)/(Z, $\theta$ ,V,T)/(R,X,T)/(Z, $\theta$ ,T)/(V,T)		
Function	Comparator, self-calibration, sample delay, average, voltage limit, potential gradient compensation for impedance measurement, charge/discharge prevention during AC signal application, key lock, system test, panel saving and loading (up to 126 condition sets)		
Measurement error detection	Contact check, measurement current error, voltage drift on measured object, overvoltage input, voltage limit		
Interface	RS-232C/USB (virtual COM port) * Cannot be used simultaneously Transmission speed: 9,600 bps/19,200 bps/38,400 bps		
EXT. I/O	TRIG, LOAD, Hi, IN, Lo, and others (NPN/PNP can be switched)		
Allowable input voltage	Up to 5 V		
Operating temperature and humidity range	0°C to 40°C, 80% RH or less (no condensation)		
Storage temperature and humidity range	-10°C to 50°C, 80% RH or less (no condensation)		
Operating environment	Indoor, pollution degree 2, altitude up to 2,000 m		
Power supplies	Rated supply voltage: 100 to 240 VAC Rated supply frequency: 50/60 Hz		
Rated power	80 VA		
Dielectric strength	1.62 kVAC, 1 min, cutoff current 10 mA (Between power supply terminal lump and protective ground)		
Applicable standards	Safety: EN61010 EMC: EN61326, EN61000-3-2, EN61000-3-3		
Dimensions and mass	Approx. 330W $\times$ 80H $\times$ 293D mm (12.99W $\times$ 3.15H $\times$ 11.54D in), Approx. 3.7 kg (130.5 oz)		
Accessories	Power cord $\times 1$ , instruction manual $\times 1$ , zero-adjustment board $\times 1$ , USB cable (A-B type) $\times 1$ , CD-R (communication instruction manual, PC application software, USB driver) $\times 1$		

# Instrument




## Model : BATTERY IMPEDANCE METER BT4560

Model No. (Order Code) (Note)


### BT4560

Note: This product is not supplied with measurement probes. Please select and purchase the measurement probe options appropriate for your application separately.

## Options



**CLIP TYPE PROBE L2002**  
Cable length 1.5 m (4.92 ft)



**PIN TYPE PROBE L2003**  
Cable length 1.5 m (4.92 ft)



**TEMPERATURE SENSOR Z2005**  
Cable length 1 m (3.28 ft)



**RS-232C CABLE 9637**  
For the PC, 9 pins - 9 pins, cross,  
Cable length 1.8 m (5.91 ft)

### Custom specification line-up

				Measurement frequency	
				Standard 0.10 Hz to 1050 Hz	Custom 0.01 Hz to 1050 Hz
Measurement voltage	Standard	5 V ( $\pm 5.10000$ V)	Measuring range: 3m $\Omega$ /10 m $\Omega$ /100 m $\Omega$ Measurement current: 1.5 A/500 mA/50 mA	Standard specification	Custom specifications 1
	Custom	10 V ( $\pm 9.99999$ V)	Measuring range: 30 m $\Omega$ /300 m $\Omega$ Measurement current: 500 mA/50 mA	Custom specifications 2	Custom specifications 3
	Custom	20 V ( $-1.00000$ V to 20.40000 V)	Measuring range: 30 m $\Omega$ /300 m $\Omega$ /3 $\Omega$ Measurement current: 150 mA/50 mA/5 mA	Custom specifications 4	Custom specifications 5

#### Custom-made options



**4-TERMINAL PROBE L2000**  
Cable length 1 m (3.28 ft)

#### Custom-made SET options




**BNC-Banana Plug Transducer**

+



**PIN TYPE PROBE 9770, 9771, 9772**  
Cable length 0.85 m (2.8 ft)


#### Probe tip shape



9770



9771



9772

## Measure electrochemical parts and materials



For property evaluation of electrodes and electrolyte

## Model : CHEMICAL IMPEDANCE ANALYZER IM3590

Model No. (Order Code)

### IM3590

Measurement range : 100 m $\Omega$  to 100 M $\Omega$   
Measurement frequency : 1 mHz to 200 kHz

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

# HIOKI

HIOKI E. E. CORPORATION

#### HEADQUARTERS

81 Koizumi, Ueda, Nagano 386-1192 Japan  
TEL +81-268-28-0562 FAX +81-268-28-0568  
<http://www.hioki.com> / E-mail: [os-com@hioki.co.jp](mailto:os-com@hioki.co.jp)

#### HIOKI USA CORPORATION

TEL +1-609-409-9109 FAX +1-609-409-9108  
<http://www.hioki.com> / E-mail: [hioki@hioki.com](mailto:hioki@hioki.com)

HIOKI (Shanghai) SALES & TRADING CO., LTD.  
TEL +86-21-6391-0090/0092 FAX +86-21-6391-0360  
<http://www.hioki.cn> / E-mail: [info@hioki.com.cn](mailto:info@hioki.com.cn)

#### DISTRIBUTED BY

HIOKI SINGAPORE PTE. LTD.  
TEL +65-6634-7677 FAX +65-6634-7477  
E-mail: [info-sg@hioki.com.sg](mailto:info-sg@hioki.com.sg)

HIOKI KOREA CO., LTD.  
TEL +82-2-2183-8847 FAX +82-2-2183-3360  
E-mail: [info-kr@hioki.co.jp](mailto:info-kr@hioki.co.jp)

HIOKI EUROPE GmbH  
TEL +49-6173-3234063 FAX +49-6173-3234064  
E-mail: [hioki@hioki.eu](mailto:hioki@hioki.eu)